





LUCERE DISPLAYS, LLC

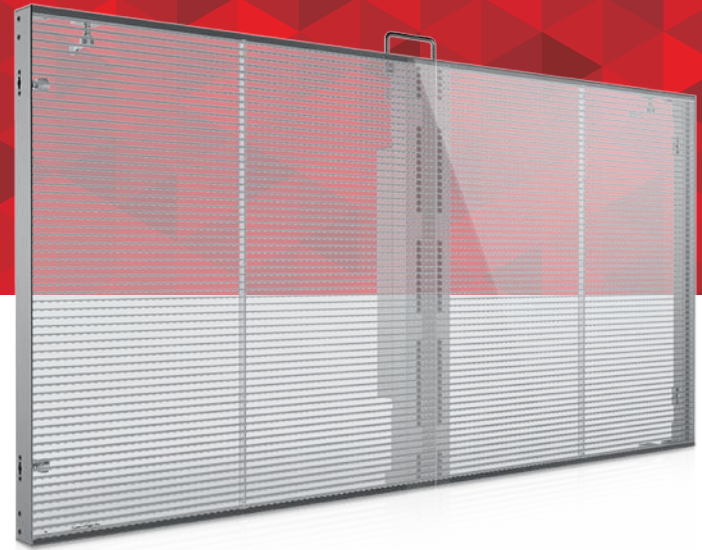

Crystal Series

Indoor & Outdoor transparent LED screen


Specially design for extreme conditions for outdoor applications

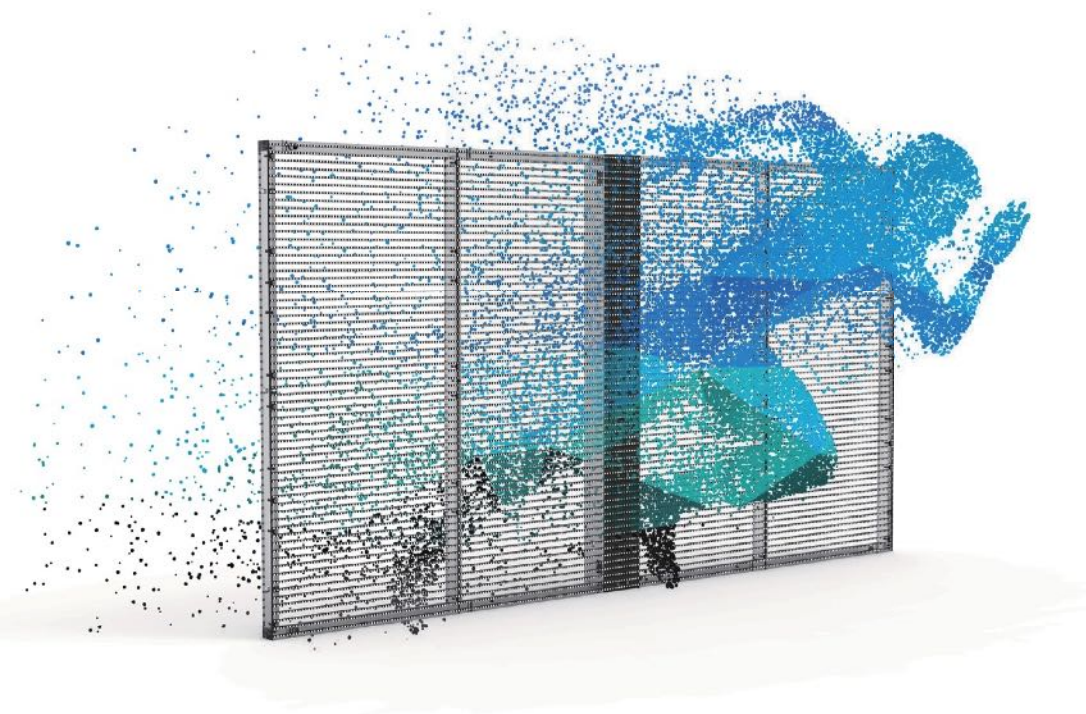

Very see-through, without any change of architectural appearance and transparency of glass wall, create the open view in large space indoors, and make advertising emerge into architecture and life.

LUCERE DISPLAYS Transparent LED series is suitable for indoor and outdoor.

Product features:

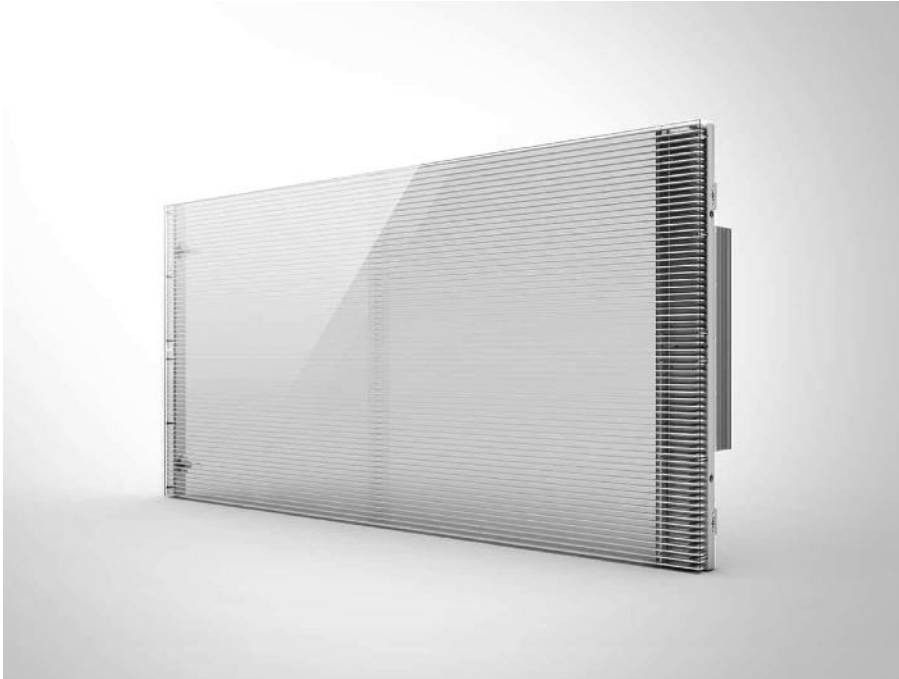

The cabinet and module adopt high permeability, light and thin design, up to 75%.



The weight per square meter is only 5.2KG. No need much space and no need to change the building structure.




Energy saving, no need for air conditioning



Convenient installation & maintenance;

Product features:

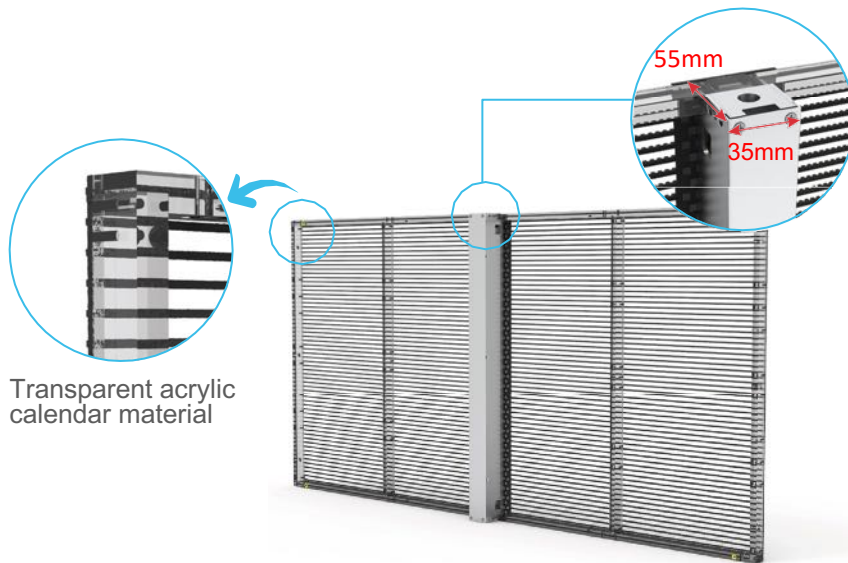


The module and box structure adopt a highly transparent and compact design. The width of the back power supply and the system box is only 35mm at the thickest part of 55mm.

The frame of the box is made of transparent plexiglass material, which makes the screen look more beautiful and simple;





The screen body will be hidden after installation, which makes the permeability higher.

Installation & Maintenance:


Front & Rear Maintenance

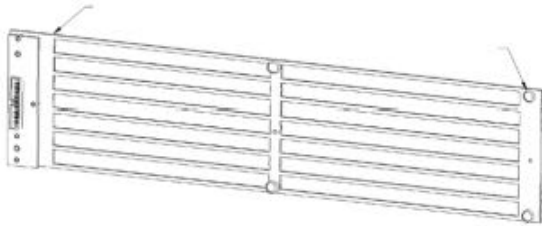

Magnetic installation

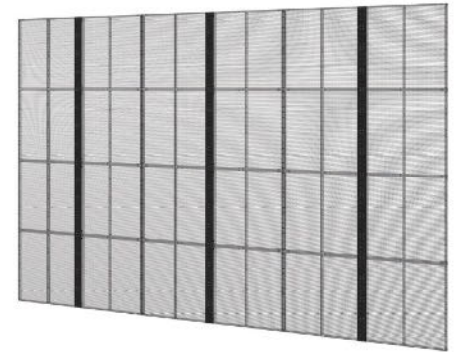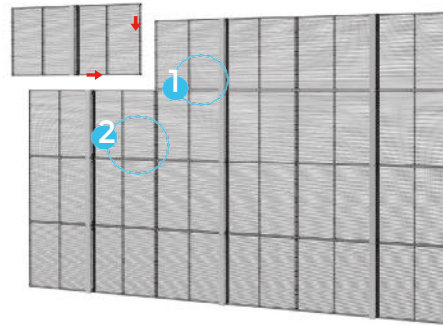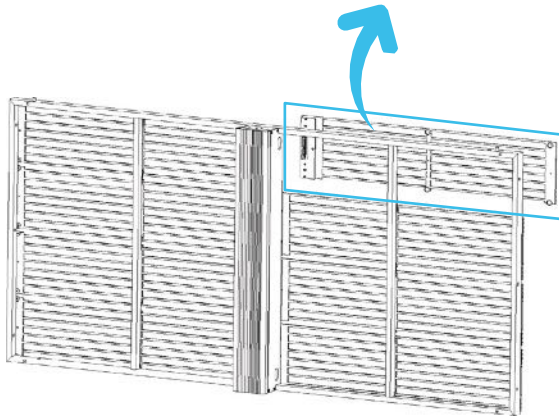


Upper and lower connection




Lock with screw

Lock the cabinets

Creative installation:

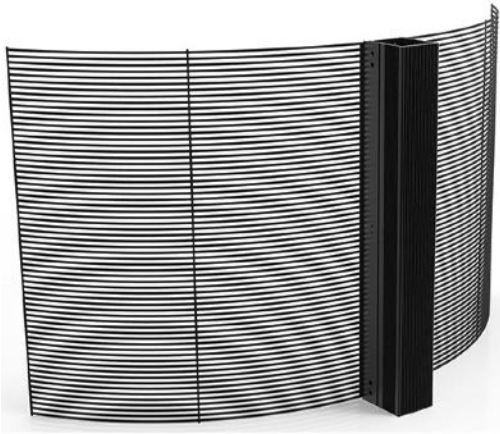

Curve shape optional

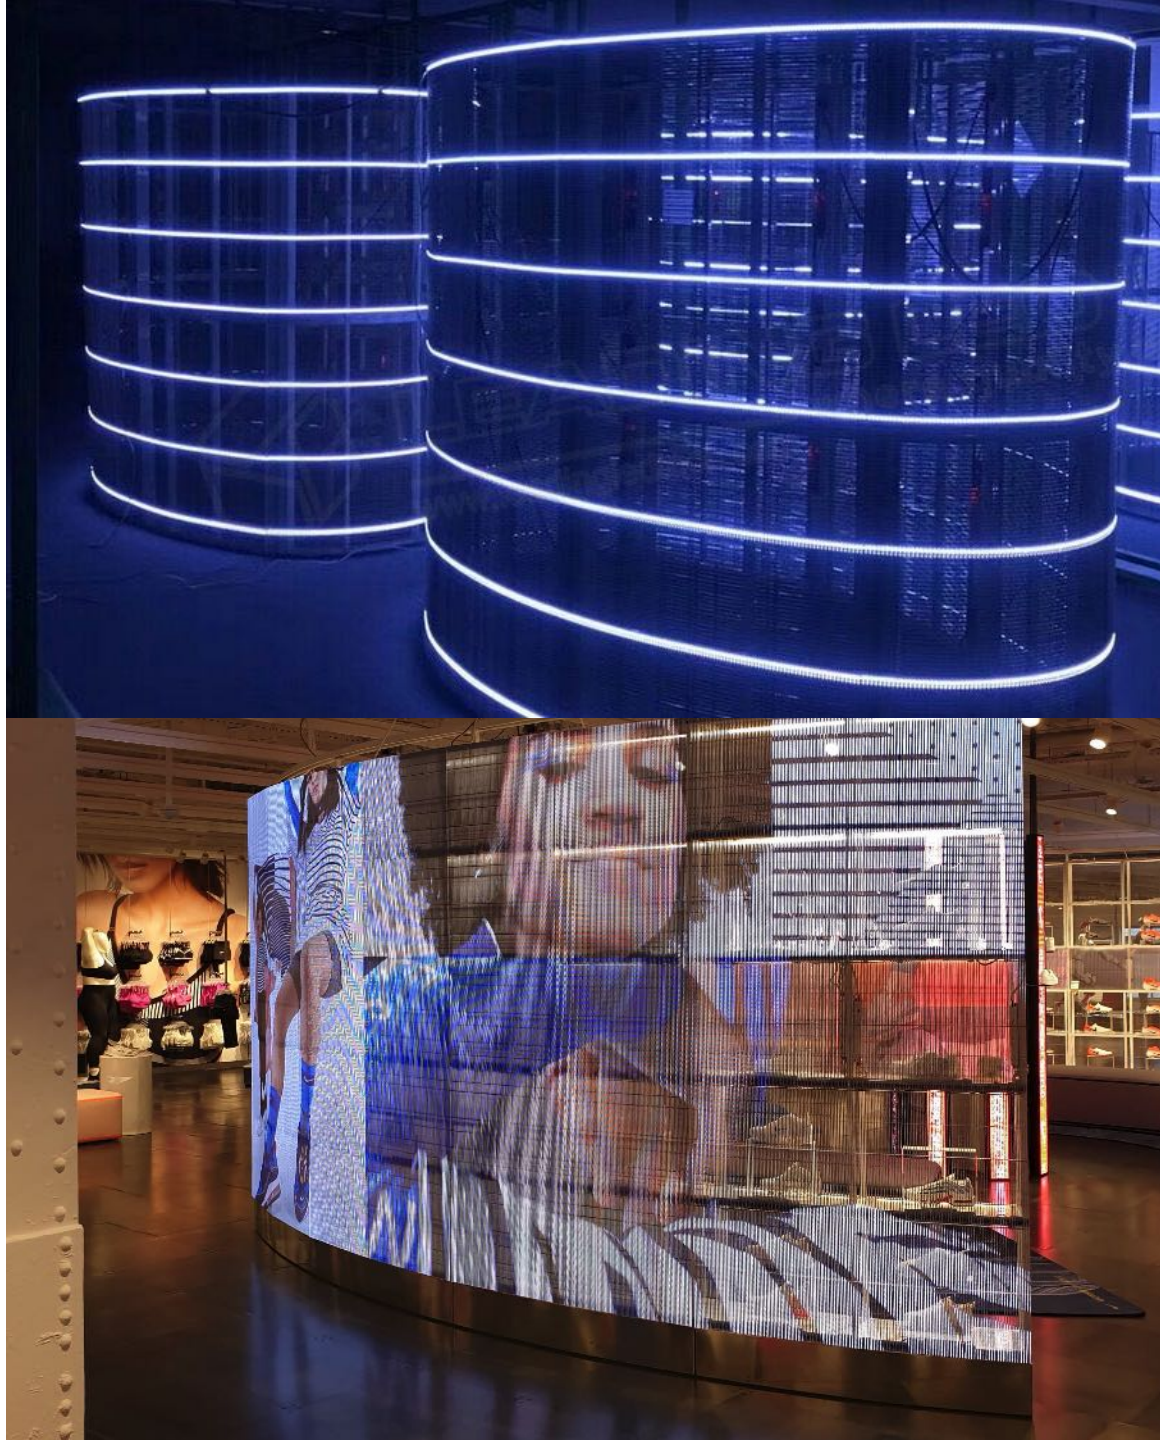




Rental type transparent panel
for stage / events



360 round shape transparent LED


Customized diameter

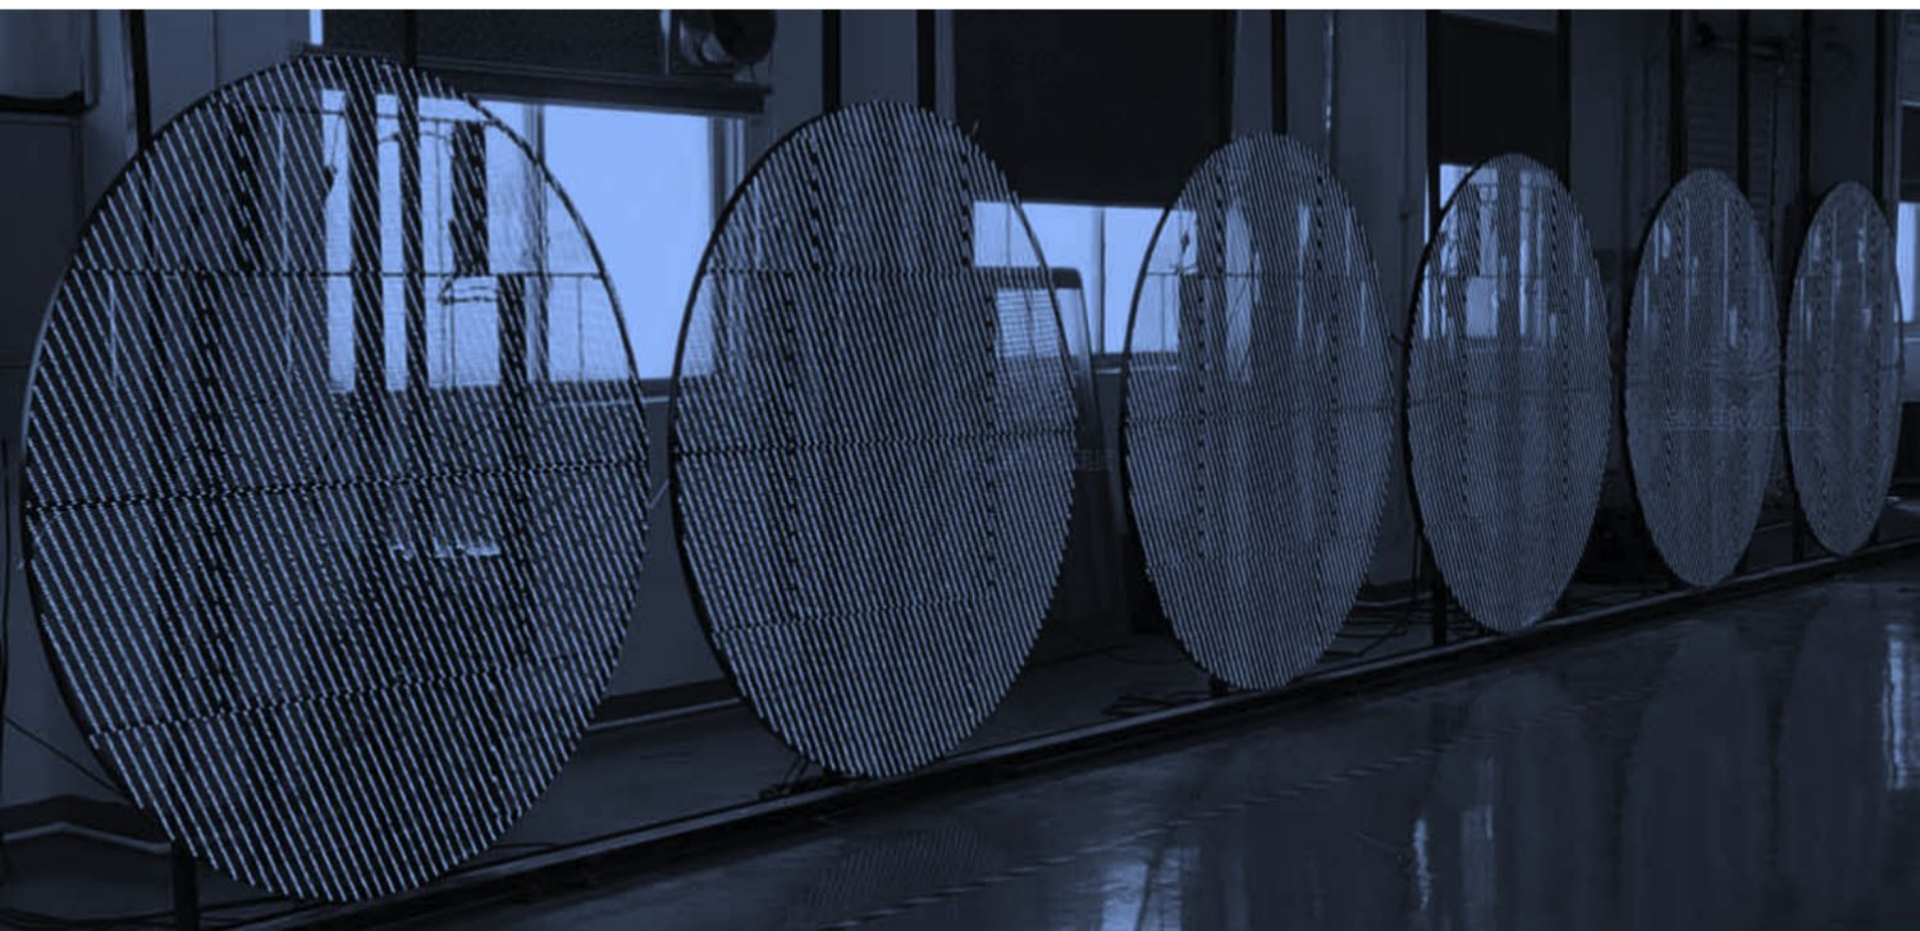

Indoor Specification

Pixel pitch(H x V)	2.6 x 5.2mm	3.9 x 7.8 mm	5.2 x 10.4mm	10.4x 10.4mm	15.6x15.6mm
LED configuration	SMD1515	SMD1921	SMD1921	SMD2727	SMD2727
Pixel Density	73728	32768	18432	9216	4096
Brightness	4500 nits	4500 nits	4500 nits	5500 nits	5500nits
Scan mode	1/12	1/8	1/4	1/2	Static
Refresh rate	5120Hz	5120Hz	3840Hz	3840Hz	3840Hz
Transparency	65%	78%	65%	65%	85%
Cabinet size	1000mm x 500mm x 80mm (W X H X D) It can be rotated 90 degrees to install				
Cabinet Pixel	384 x 96	256 x 64	192 x 48	96 x 48	64 x 16
Panel weight	2.5kg	4kg	4kg	4kg	4kg
Input voltage	AC100~240V 50/60 HZ				
Power consumption (Avg)	260W/sqm				
Power consumption (Max)	800W/sqm				
Working temperature & Humidity	-10°C~40°C, 10%-90% non-condensing				
IP rating	IP43				
Life span	100,000 hrs				
Warranty	24 months				

Product features:

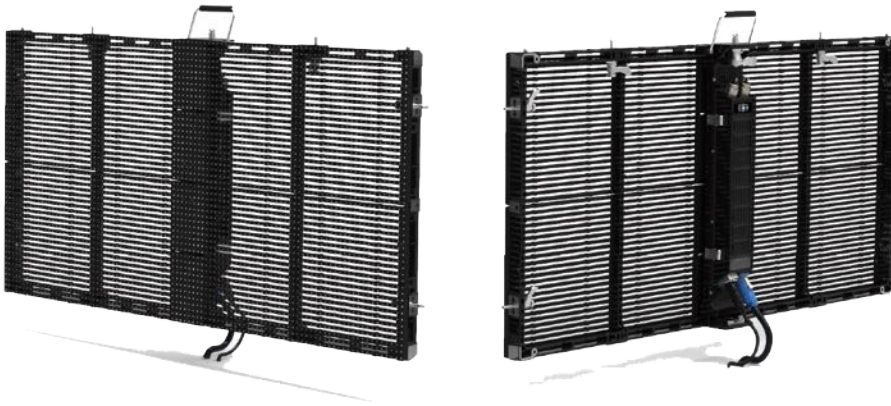

Fully sealed, IP65 protection, waterproof, dustproof and anti-collision.



Up to 75% high transparency.



The weight per square meter is only 5.2KG.
No need much space & change the building structure.







Energy saving, no need for air conditioning



Convenient installation & maintenance;

Product features:

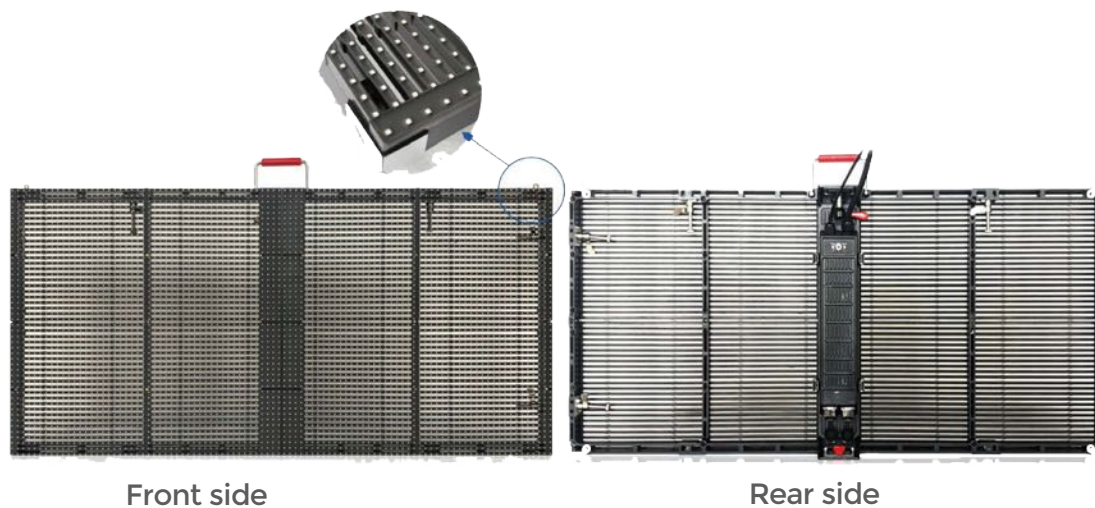


Full seal, high protection
& waterproof

Evaporation on the
surface, no damage

No worries about collision

No damage after collision

Product features:

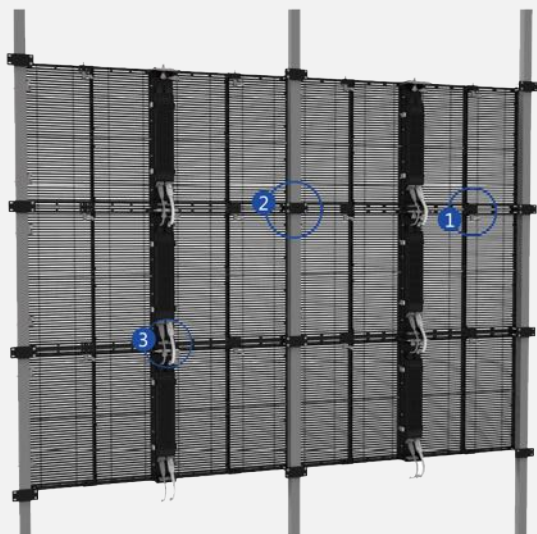


Upper &
lower
connecion



Connection
Piece with
screws




Upper &
lower fixation

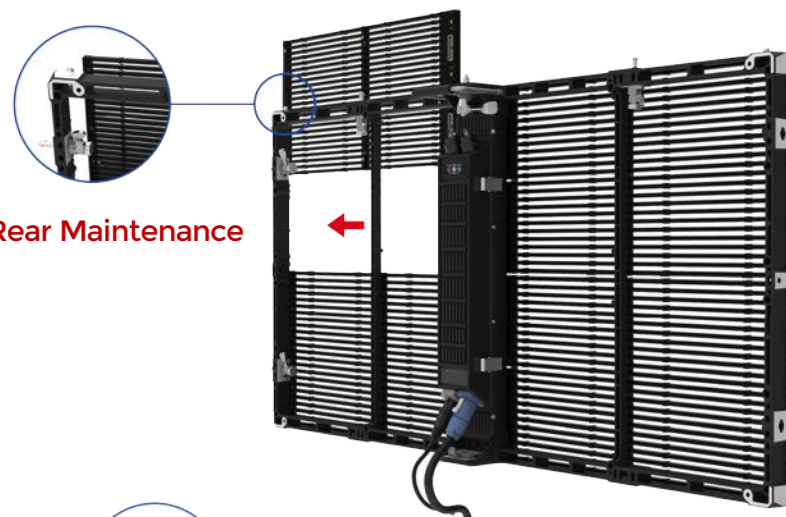

Rear Maintenance



Front Maintenance

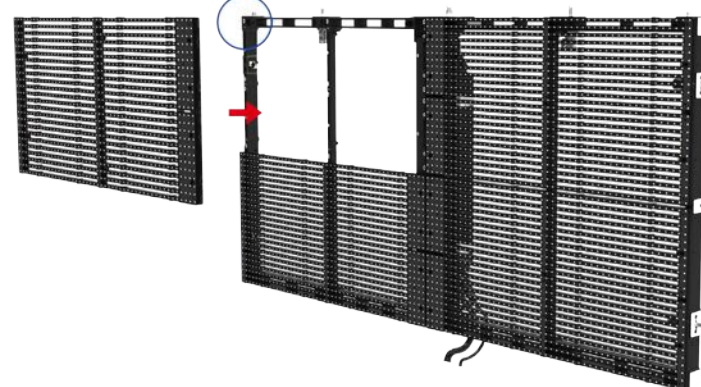

Outdoor Specification

Pixel pitch(H x V)	3.9 x 7.8 mm	5.2 x 10.4mm	10.4x 10.4mm	15.6 x 15.6mm
LED configuration	SMD1921	SMD1921	SMD2727	SMD2727
Pixel Density	32768	18432	9216	4096
Brightness	4500 nits	4500 nits	5500 nits	5500nits
Scan mode	1/8	1/4	1/2	Static
Refresh rate	3840Hz	3840Hz	3840Hz	3840Hz
Transparency	53%	58%	58%	71%
Cabinet size	1000mm x 500mm x 80mm (W X H X D) It can be rotated 90 degrees to install			
Cabinet Pixel	256 x 64	192 x 48	96 x 48	64 x 16
Panel weight	8kg	8kg	8kg	8kg
Input voltage	AC100~240V 50/60 HZ			
Power consumption (Avg)	260W/sqm			
Power consumption (Max)	800W/sqm			
Working temperature & Humidity	-10°C~40°C, 10%-90% non-condensing			
IP rating	IP65			
Life span	100,000 hrs			
Warranty	24 months			

Services



Customized

Customize products for customers.



Online service

24-hour English online service



One-stop service

Complete system solution to improve operation efficiency.



Remote online service

Remote online debugging



Lifelong maintenance

Product lifetime maintenance



Efficient platform

Build a positive interaction platform

Packing & Transport

Fixed board+foam+ corner protection+Wooden or flight case



C



**Outdoor
Transparent LED**
Shopping mall

Outdoor Transparent LED Shopping mall






**Indoor
Transparent LED**
Shopping mall



Indoor & outdoor Transparent LED
For retail markets

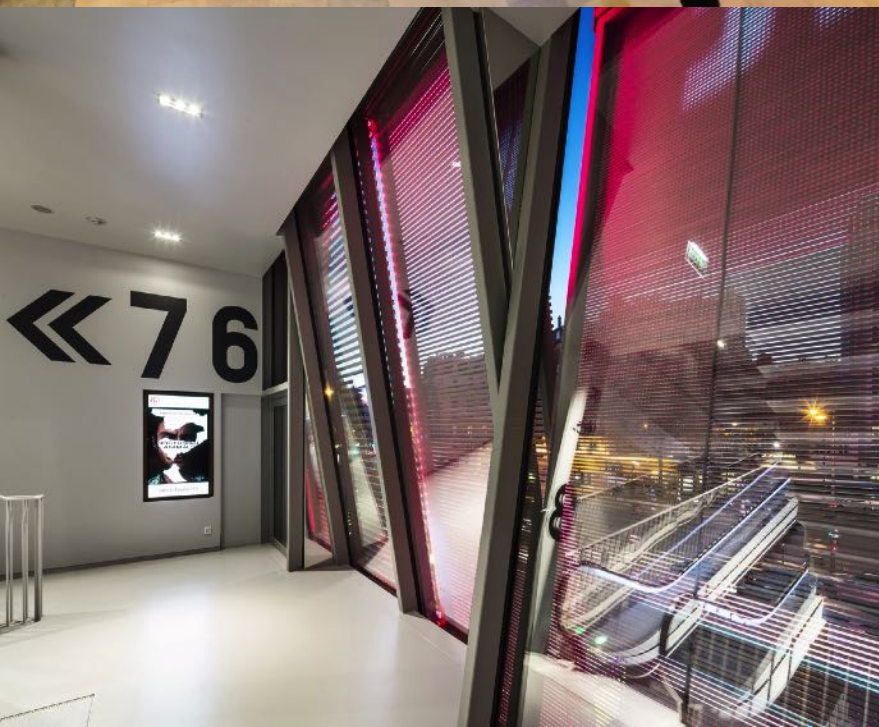

LUCERE DISPLAYS Service

Customer' value is our top priority



Free inquiry with solutions

We will quote for any inquiry within 24 hours with quotations & specifications



Free drawing

Free drawing of structure, signal & power cable connection, customized solutions if needed



7/24 online technical support

Sales technical supports are ready anytime within warranty

Contact



Locations
Philadelphia / Nashville



Tel: 855 MYDISPLAY
855 693 4775



Email: info@luceredisplays.net